

NEW LIGHTWEIGHT ROTOMOLDED CASES

**PELICAN-HARDIGG™
LIGHT LIFT™ CASES**



SINCE 1976

MIGHT MEETS LIGHT
PELICAN-HARDIGG™ LIGHT LIFT™ CASES






INTRODUCING PELICAN-HARDIGG™ LIGHT LIFT™ CASES

NEW LIGHTWEIGHT VERSION OF OUR HEAVY DUTY ROTO MOLD LINE

UP TO
30%
LIGHTER

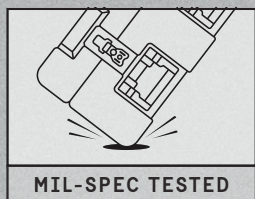


Pelican-Hardigg™ Light Lift™ cases combine agility and durability. At up to 30%* lighter than our traditional heavy-duty roto mold cases, the Pelican-Hardigg™ Light Lift™ series allows for faster deployment and reduced shipping costs, without compromising protection. The Pelican-Hardigg™ Light Lift™ series is the most significant advancement of roto molded cases on earth.

Pelican-Hardigg™ Light Lift™ series: Every ounce counts.

Lower transportation costs:

- Less shipping cost
- Less fuel cost
- Less landing fees
- Less man power

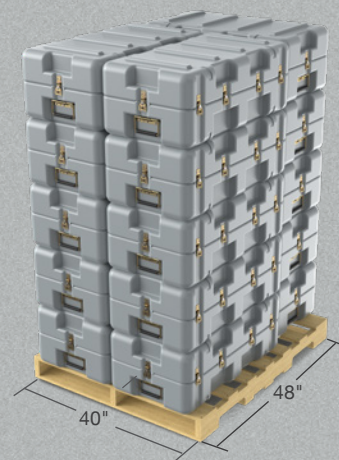

Pallet of 15 Pelican-Hardigg™ AL2914-0605 Light Lift™ cases saves 96 lbs. when compared to equivalent heavy-duty roto mold case sizes.

* Weight varies $\pm 5\%$ based on case size/model



ROTATIONALLY MOLDED EFFICIENCY



All Pelican-Hardigg™ Light Lift™ cases are configurable rotomolded cases. The base configuration is gray, zinc yellow catch & strike hardware, free breathing, with recessed handles to prevent shearing or snagging from outside forces. Configurable options, such as optional 13 colors, a Pressure Relief Valve to control airflow, edge casters for mobility, locking cable catches for security, allow you to build a case to fit your specific storage or transportation needs.



ROTO MOLDING LIGHT LIFT™ CASES

Our cases begin as a resin powder specifically formulated for Pelican-Hardigg™ Light Lift™ cases. Our Light Lift polyethylene is a custom formulation engineered to enhanced case strength and shock resistance, especially in cold environment applications.

“HUMAN CARRY” MISSION

Pelican-Hardigg™ Light Lift™ cases designed to meet MIL-STD-1472G for up to 300 Gross Lbs. (137.89 kg) payload, the maximum for a 4-man carry application allowing for lighter carrying loads for faster and easier transport.

LIGHT LIFT™ CASE SPECIFICATIONS

HEAVY-DUTY CASE			LIGHT LIFT™ CASE (Up To 30% Lighter)			INTERIOR DIMENSIONS					
Cat No	Weight*		Weight*		Cat.No.	Length	Width	Height	Length	Width	Height
	(lb)	(kg)	(lb)	(kg)		(in)	(in)	(in)	(mm)	(mm)	(mm)
AL2624-0503	24.00	16.80	10.89	7.62	AL2624-0503LW	26.00	660	24.12	613	8.75	222
AL2624-0505	28.00	19.60	12.70	8.89	AL2624-0505LW	26.00	660	24.12	613	10.43	265
AL2624-0513	32.00	22.40	14.51	10.16	AL2624-0513LW	26.00	660	24.12	613	18.49	470
AL2624-0803	28.00	19.60	12.70	8.89	AL2624-0803LW	26.00	660	24.12	613	11.43	290
AL2624-0803W	28.00	19.60	12.70	8.89	AL2624-0803WLW	26.00	660	24.12	613	11.43	290
AL2624-0805	31.30	21.91	14.20	9.94	AL2624-0805LW	26.06	662	24.00	610	13.12	333
AL2624-0805W	31.30	21.91	14.20	9.94	AL2624-0805WLW	26.06	662	24.00	610	13.12	333
AL2624-0813	36.20	25.34	16.42	11.49	AL2624-0813LW	26.06	662	24.00	610	21.18	538
AL2624-1203	31.00	21.70	14.06	9.84	AL2624-1203LW	26.00	660	24.12	613	15.24	387
AL2624-1205	34.10	23.87	15.47	10.83	AL2624-1205LW	26.06	662	24.00	610	16.93	430
AL2624-1803	35.00	24.50	15.88	11.11	AL2624-1803LW	26.00	660	24.12	613	21.18	538
AL2727-0404	30.50	21.35	13.83	9.68	AL2727-0404LW	27.00	686	27.00	686	7.49	190
AL2727-0405	32.00	22.40	14.51	10.16	AL2727-0405LW	27.00	686	27.00	686	8.62	219
AL2727-0409	34.50	24.15	15.65	10.95	AL2727-0409LW	27.00	686	27.00	686	12.87	327
AL2727-0414	38.50	26.95	17.46	12.22	AL2727-0414LW	27.00	686	27.00	686	17.87	454
AL2727-0504	30.60	21.42	13.88	9.72	AL2727-0504LW	27.00	686	27.00	686	8.87	225
AL2727-0505	32.00	22.40	14.51	10.16	AL2727-0505LW	27.00	686	27.00	686	10.00	254
AL2727-0509	34.60	24.22	15.69	10.99	AL2727-0509LW	27.00	686	27.00	686	14.25	362
AL2727-0514	38.70	27.09	17.55	12.29	AL2727-0514LW	27.00	686	27.00	686	19.25	489
AL2727-0904	33.00	23.10	14.97	10.48	AL2727-0904LW	27.00	686	27.00	686	12.67	322
AL2727-0905	34.50	24.15	15.65	10.95	AL2727-0905LW	27.00	686	27.00	686	13.80	351
AL2727-0909	37.00	25.90	16.78	11.75	AL2727-0909LW	27.00	686	27.00	686	18.05	458
AL2727-1404	37.10	25.97	16.83	11.78	AL2727-1404LW	27.00	686	27.00	686	17.99	457
AL2727-1405	38.60	27.02	17.51	12.26	AL2727-1405LW	27.00	686	27.00	686	19.12	486
AL2818-0805	26.50	18.55	12.02	8.41	AL2818-0805LW	28.12	714	18.12	460	13.24	336
AL2909-0605	15.90	11.13	7.21	5.05	AL2909-0605LW	28.50	724	8.50	216	11.25	286
AL2914-0605	20.60	14.42	9.34	6.54	AL2914-0605LW	29.60	752	14.80	376	10.30	262
AL2914-0606	21.50	15.05	9.75	6.83	AL2914-0606LW	29.60	752	14.80	376	11.60	295
AL2914-0905	23.10	16.17	10.48	7.33	AL2914-0905LW	28.87	733	14.50	368	14.05	357
AL2914-0906	24.50	17.15	11.11	7.78	AL2914-0906LW	28.87	733	14.50	368	15.05	382
AL3018-0402	20.40	14.28	9.25	6.48	AL3018-0402LW	29.75	756	17.87	454	7.12	181
AL3018-0403	21.20	14.84	9.62	6.73	AL3018-0403LW	29.75	756	17.87	454	8.12	206
AL3018-0405	21.50	15.05	9.75	6.83	AL3018-0405LW	29.75	756	17.87	454	9.75	248
AL3018-0409	27.70	19.39	12.56	8.80	AL3018-0409LW	29.75	756	17.87	454	13.75	349
AL3018-0802	24.90	17.43	11.29	7.91	AL3018-0802LW	29.75	756	17.87	454	10.80	274
AL3018-0802W	24.90	17.43	11.29	7.91	AL3018-0802WLW	29.75	756	17.87	454	10.80	274

* Case weights are estimated and may vary up to +/-5% depending upon case size. For weight critical applications contact Pelican Customer Service.

LIGHT LIFT™ CASE SPECIFICATIONS

HEAVY-DUTY CASE			LIGHT LIFT™ CASE (Up To 30% Lighter)			INTERIOR DIMENSIONS					
Cat No	Weight*		Weight*		Cat.No.	Length	Width	Height	Length	Width	Height
	(lb)	(kg)	(lb)	(kg)		(in)	(in)	(in)	(mm)	(mm)	(mm)
AL3018-0803	25.70	17.99	11.66	8.16	AL3018-0803LW	29.75	756	17.87	454	11.80	300
AL3018-0803W	25.70	17.99	11.66	8.16	AL3018-0803WLW	29.75	756	17.87	454	11.80	300
AL3018-0805	26.00	18.20	11.79	8.26	AL3018-0805LW	29.75	756	17.87	454	13.43	341
AL3018-0805W	26.00	18.20	11.79	8.26	AL3018-0805WLW	29.75	756	17.87	454	13.43	341
AL3018-0809	32.20	22.54	14.61	10.22	AL3018-0809LW	29.75	756	17.87	454	17.43	443
AL3018-0809W	32.20	22.54	14.61	10.22	AL3018-0809WLW	29.75	756	17.87	454	17.43	443
AL3018-0902	26.80	18.76	12.16	8.51	AL3018-0902LW	29.75	756	17.87	454	11.99	305
AL3018-0902W	26.80	18.76	12.16	8.51	AL3018-0902WLW	29.75	756	17.87	454	11.99	305
AL3018-0903	27.60	19.32	12.52	8.76	AL3018-0903LW	29.75	756	17.87	454	12.99	330
AL3018-0903W	27.60	19.32	12.52	8.76	AL3018-0903WLW	29.75	756	17.87	454	12.99	330
AL3018-0905	27.80	19.46	12.61	8.83	AL3018-0905LW	29.75	756	17.87	454	14.62	371
AL3018-0905W	27.80	19.46	12.61	8.83	AL3018-0905WLW	29.75	756	17.87	454	14.62	371
AL3018-0909	33.90	23.73	15.38	10.76	AL3018-0909LW	29.75	756	17.87	454	18.62	473
AL3018-0909W	33.90	23.73	15.38	10.76	AL3018-0909WLW	29.75	756	17.87	454	18.62	473
AL3018-1502	29.70	20.79	13.47	9.43	AL3018-1502LW	29.75	756	17.87	454	17.49	444
AL3018-1502W	29.70	20.79	13.47	9.43	AL3018-1502WLW	29.75	756	17.87	454	17.49	444
AL3018-1503	30.50	21.35	13.83	9.68	AL3018-1503LW	29.75	756	17.87	454	18.49	470
AL3018-1503W	30.50	21.35	13.83	9.68	AL3018-1503WLW	29.75	756	17.87	454	18.49	470
AL3018-1505	31.80	22.26	14.42	10.10	AL3018-1505LW	29.75	756	17.87	454	20.12	511
AL3018-1505W	31.80	22.26	14.42	10.10	AL3018-1505WLW	29.75	756	17.87	454	20.12	511
AL3018-1509	37.00	25.90	16.78	11.75	AL3018-1509LW	29.75	756	17.87	454	24.12	613
AL3018-1509W	37.00	25.90	16.78	11.75	AL3018-1509WLW	29.75	756	17.87	454	24.12	613
AL3535-1605	68.00	47.60	30.84	21.59	AL3535-1605LW	35.50	902	35.50	902	20.87	530
AL3620-1704	41.60	29.12	18.87	13.21	AL3620-1704LW	35.87	911	19.87	505	21.12	536
AL3627-1505	50.30	35.21	22.82	15.97	AL3627-1505LW	35.87	911	27.00	686	19.99	508

TEST RESULTS

MIL-STD-810 FALLING RAIN TEST	Pass/Similarity	MIL-STD-810 HUMIDITY	Pass/Similarity	FED-STD-101C RANDOM VIBRATION	Pass
MIL-STD-810 SALT FOG	Pass/Similarity	MIL-STD-810 HI/LO TEMP STORAGE	Pass	ATA-300 SWEEP/DWELL VIBRATION	Pass
MIL-STD-810 FUNGUS	Pass/Similarity	FED-STD-101C 73°F DROPS	Pass	GMTK II TOOLBOX STRAPPING LOAD	Pass
MIL-STD-810 WATER VAPOR	Pass/Similarity	FED-STD-101C -40°F DROPS**	Pass	ATA-300 FALLING DART (13 LB DROP)	Pass
MIL-STD-810 BLOWING SAND	Pass/Similarity	FED-STD-101C 140°F DROPS	Pass		
MIL-STD-810 ALTITUDE	Pass/Similarity	FED-STD-101C LOOSE CARGO BOUNCE	Pass		

* Case weights are estimated and may vary up to +/-5% depending upon case size. For weight critical applications contact Pelican Customer Service.

** With application specific testing; PASS/FAIL is based upon payload and case conuguration.

DISTRIBUTED BY:

For warranty details go to www.pelican.com/warranty

©2021 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

Part. No. 0030-LLB-000 SE/21